

# Flexible Link


BUSDUCT SYSTEM

FLANGE END

TRANSFORMER LV BOX  
(NOT THE SCOPE OF BUSDUCT MANUFACTURERS)

FLEXIBLE LINK

## Dimension of Braided Type Copper Flexible Link

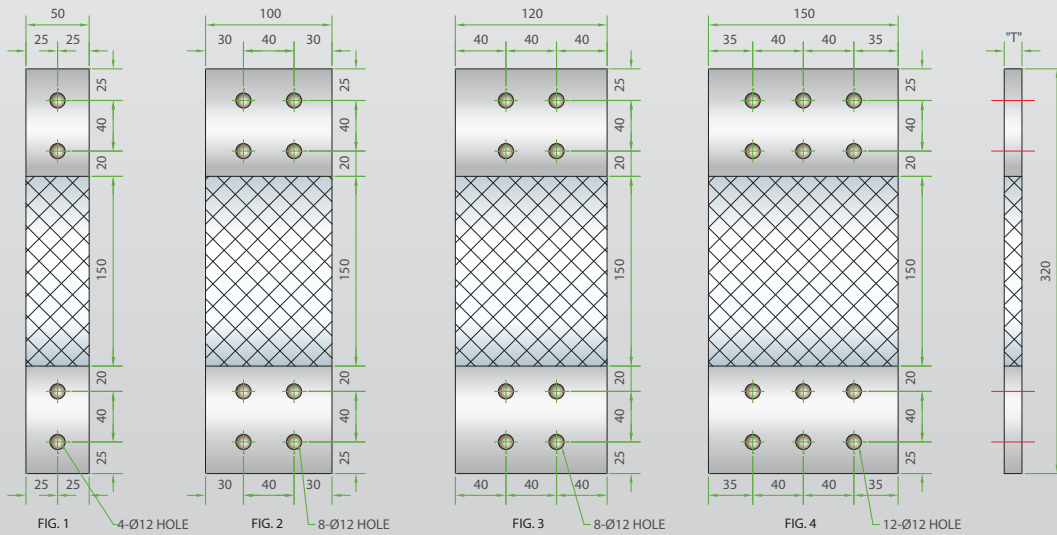

Busduct Rating	Conductor Size per Phase (mm)	Fig	Model	Dimension "T" (mm)
400A	One - 6 x 20	1	F5013 x 1	13
600A	One - 6 x 30			
700A	One - 6 x 40			
800A	One - 6 x 45			
1000A	One - 6 x 60	2	F5013 x 2	13
1250A	One - 6 x 75			
1600A	One - 6 x 110	3	F12014 x 1	14
1800A	One - 6 x 125	4	F15014 x 1	14.5
2000A	One - 6 x 150			

Busduct Rating	Conductor Size per Phase (mm)	Fig	Model	Dimension "T" (mm)
2200A	One - 6 x 175	4	F15016 x 1	16
2500A	One - 6 x 200			
3000A	Two - 6 x 110	3	F12014 x 2	14
3500A	Two - 6 x 125			
4000A	Two - 6 x 150	4	F15014 x 2	14.5
4500A	Two - 6 x 175	4	F15016 x 2	16
5000A	Two - 6 x 200			
6300A	Three - 6 x 175	4	F15016 x 3	16